




## Lock Nuts

Lock nuts, also referred to as jam nuts, are typically  $\frac{2}{3}$  of the thickness of its respective hex nut series counterpart. Locknuts are tightened against the turnbuckle body to ensure that the turnbuckle does not loosen under tension.



| Turnbuckle |  | Dimensions in inches |      |      | Thread Diameter | Weight lbs/pair | Product Code |
|------------|--|----------------------|------|------|-----------------|-----------------|--------------|
| Size       |  | W                    | S    | T    |                 |                 |              |
| 3/8"       |  | 0.56                 | 0.64 | 0.22 | 3/8"            | 0.02            | 29272024     |
| 1/2"       |  | 0.75                 | 0.86 | 0.31 | 1/2"            | 0.06            | 29272032     |
| 5/8"       |  | 0.94                 | 1.06 | 0.38 | 5/8"            | 0.11            | 29272040     |
| 3/4"       |  | 1.13                 | 1.26 | 0.42 | 3/4"            | 0.15            | 29272048     |
| 7/8"       |  | 1.31                 | 1.50 | 0.48 | 7/8"            | 0.22            | 29272056     |
| 1"         |  | 1.50                 | 1.69 | 0.55 | 1"              | 0.40            | 29272100     |
| 1-1/4"     |  | 1.50                 | 1.69 | 0.55 | 1-1/4"          | 0.79            | 29272016     |

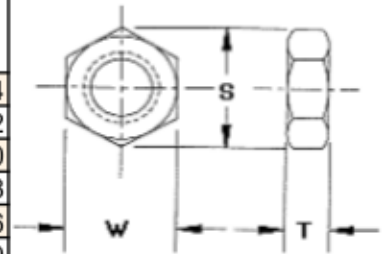

Supplied in pairs:

1 right hand painted Orange

1 left hand painted Yellow

Do not over tighten locknuts during installation.

**WARNING** Lock Nuts do not have an established load rating and are meant to serve as a locking device only.